

1245



Mountain Region – Western Montana
4800 Wilkie Street – Missoula, MT 59808

Date: January 23rd, 2026
Name: Victor School District - Attn: Stacey Richie
Address: 425 4th Ave. Victor, MT 59875
Phone: 406 – 370 – 9156
E-Mail: Richie@Victor.k12.mt.us

Subject: This proposal pertains to the school bus turn around project at Victor Middle School.

Item	Description	Quantity	Units	Unit Price	Subtotal
10	Mobilization Includes all necessary trucks & equipment on and off site.	1	LS	\$2,580	\$2,580
20	Demolition & Excavation Removal of existing asphalt and pin-down curbs in project area. Excavation and haul-off of existing subgrade material to prep for new parking section.	7,860	ft ²	\$1.50	\$11,790
30	Storm Drain Sumps Installation of two new 8' deep dry well storm drains.	2	EA	\$4,750	\$9,500
40	Gravel Import & Prep Project area will receive approximately 8" of new crushed gravel base material. Gravel will be graded and compacted to prepare for 3" of new asphalt.	7,860	ft ²	\$2.00	\$15,720
50	Concrete Sidewalk Concrete crew to form and pour new sidewalk to eliminate drainage issue. Concrete to be 4" thick and have a textured broomed finish. Allow 7 day cure time.	200	ft ²	\$15.00	\$3,000
60	Asphalt Pavement Paving crew to pave hot mix asphalt. Asphalt will be rolled and compacted to a thickness of 3" minimum. Please allow 24 hours before parking on new asphalt surface.	7,660	ft ²	\$3.50	\$26,810
Grand Total					\$69,400



Mountain Region – Western Montana
4800 Wilkie Street – Missoula, MT 59808
(406) – 532 – 5250



Mountain Region – Western Montana
4800 Wilkie Street – Missoula, MT 59808

Conditions:

Knife River would be pleased to complete the work described and will make every attempt to do so during the 2026 construction season. Scheduling of this work is up to the discretion of Knife River. If the work does not take place during the summer of 2026 this proposal will have to be reissued. Communication leading up to the dates of construction will be necessary to schedule this work.

This proposal does not include or account for any of the following:

- ♦ Permits
- ♦ Land surveying / staking
- ♦ Landscaping
- ♦ Quality control testing
- ♦ Engineering drawings
- ♦ Owner changes

Knife River is not a landscaping contractor Knife River any topsoil or landscape work will not be completed by Knife River.

Unit pricing listed on proposal is for customer's reference. Payment will be expected in total.

Alterations to the project may result in changes to this estimate.

Knife River will not be obligated to perform any work not specifically stated in this proposal. Please ask for clarification for anything above not understood.

Payments are expected in full within 30 days of the date invoiced.

The signing of this proposal acknowledges this form as a mutually agreed upon contract.

If you accept this proposal, fill out the bottom of this form and return a copy to my attention. Please contact me with questions, Thank You for the opportunity to bid this work.

A handwritten signature in black ink that reads "Matthew Stafford".

Matthew Stafford


Acceptance Signature

Date



Assistant Project Manager

Cell: (406) – 880 – 4984
Office: (406) – 532 – 5222
E-Mail: Matthew.Stafford@Kniferiver.com

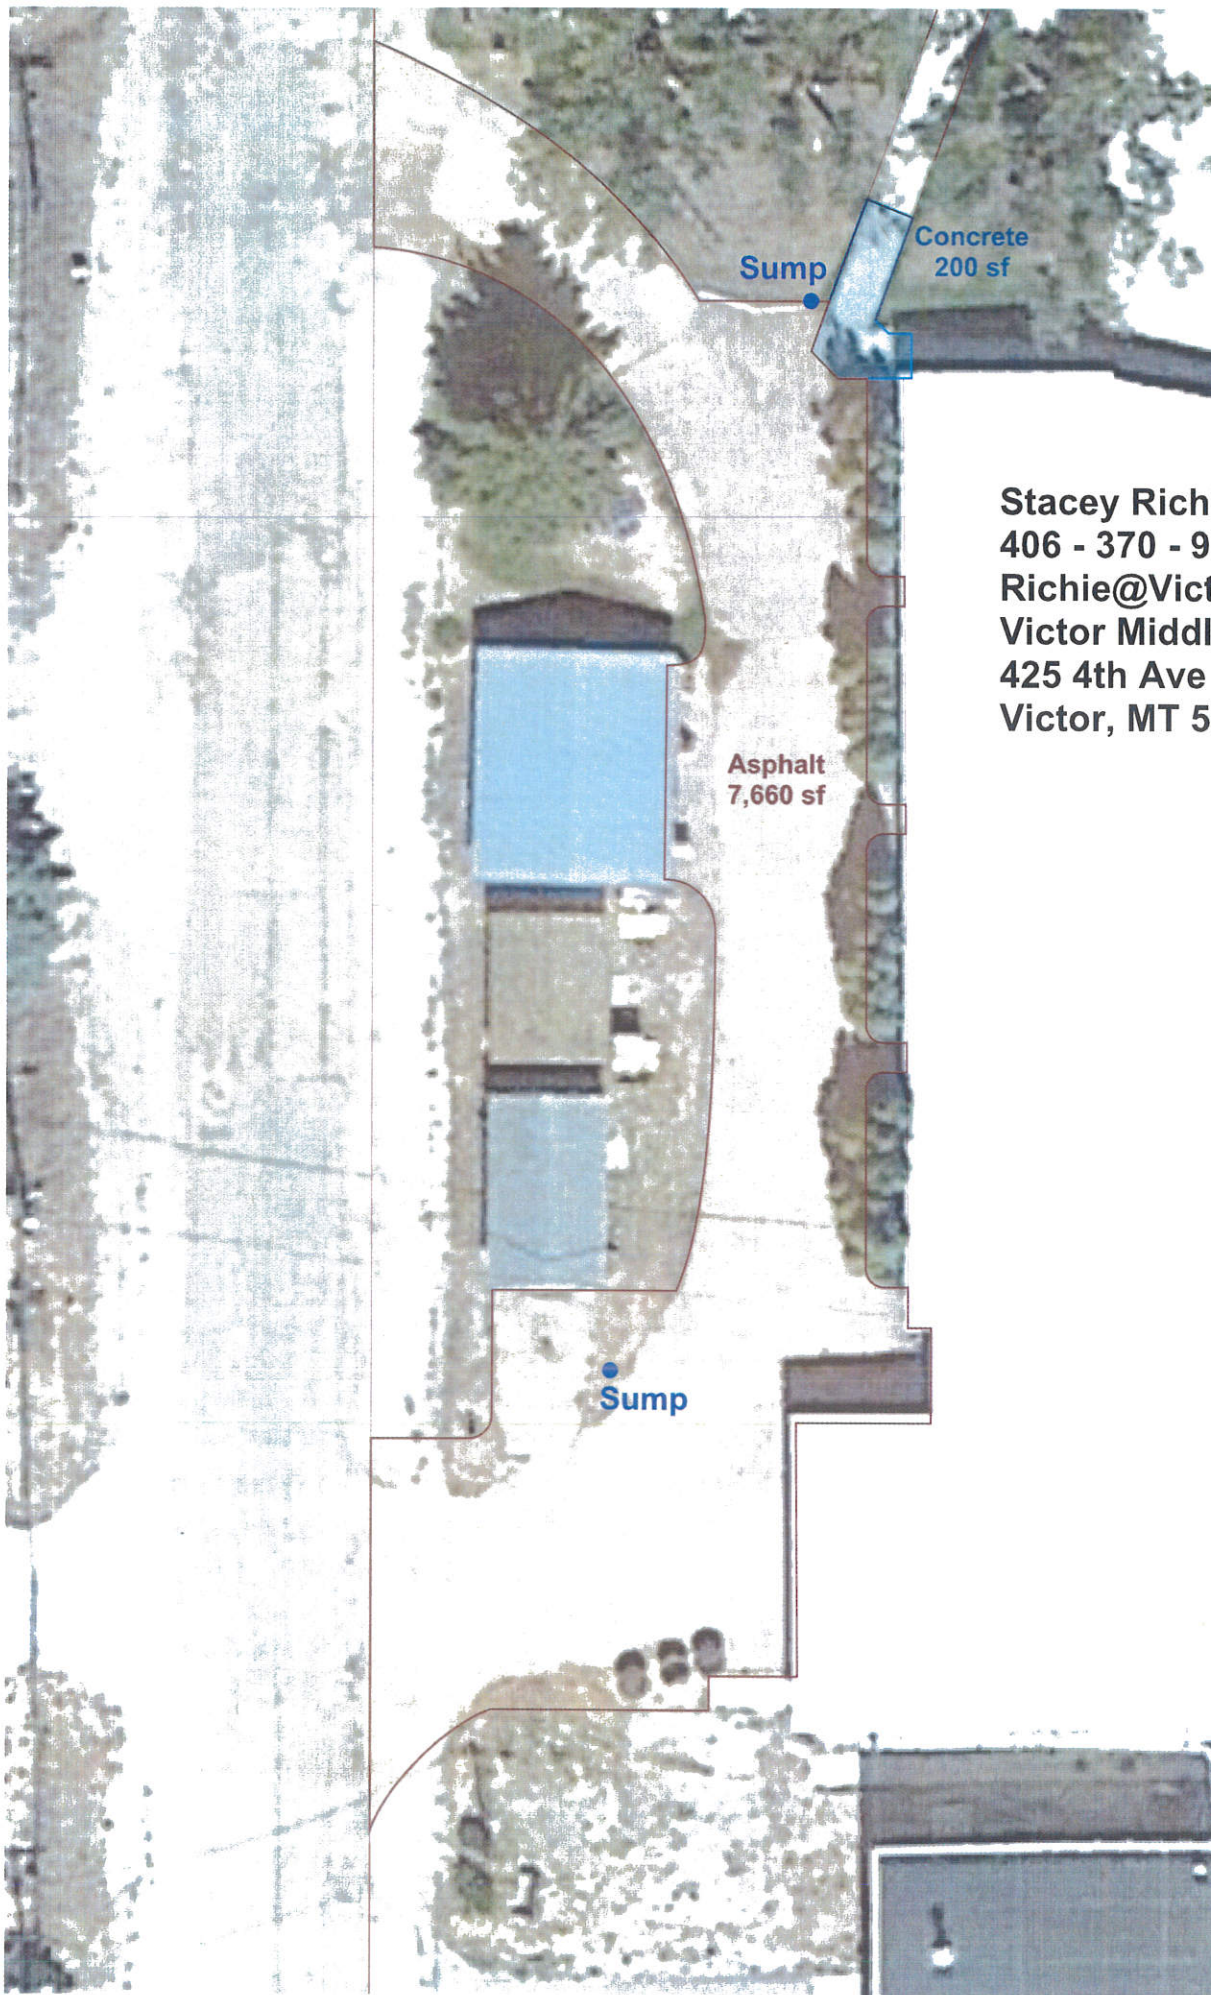

Stacey Richie
406 - 370 - 9156
Richie@Victor.k12.mt.us
Victor Middle School
425 4th Ave
Victor, MT 59875

new football field



Mountain Region – Western Montana
4800 Wilkie Street – Missoula, MT 59808

Date: January 23rd, 2026
Name: Victor School District - Attn: Stacey Richie
Address: 425 4th Ave. Victor, MT 59875
Phone: 406 – 370 – 9156
E-Mail: Richie@Victor.k12.mt.us

Subject: This proposal pertains to the student parking at Victor High School.

Item	Description	Quantity	Units	Unit Price	Subtotal
10	Mobilization Includes all necessary trucks & equipment on and off site.	1	LS	\$2,548	\$2,548
20	Demolition & Excavation Removal of existing asphalt and pin-down curbs in project area. Excavation and haul-off of existing subgrade material to prep for new parking section.	7,903	ft ²	\$1.50	\$11,854.50
30	Storm Drain Sumps Installation of two new 8' deep dry well storm drains.	2	EA	\$4,750	\$9,500
40	Gravel Import & Prep Project area will receive approximately 8" of new crushed gravel base material. Gravel will be graded and compacted to prepare for 3" of new asphalt.	7,903	ft ²	\$2.00	\$15,806
50	Concrete L Curb Concrete crew to form and pour new curb eliminate drainage issue. Concrete to be 4" thick and	329	Lft	\$36.00	\$11,844
60	Concrete Sidewalk Concrete crew to form and pour new sidewalk to eliminate drainage issue. Concrete to be 4" thick and have a textured broomed finish. Allow 7 day cure time.	1,492	ft ²	\$11.00	\$16,412
70	Asphalt Pavement Paving crew to pave hot mix asphalt. Asphalt will be rolled and compacted to a thickness of 3" minimum. Please allow 24 hours before parking on new asphalt surface.	5,753	ft ²	\$3.50	\$20,135.50
Grand Total					\$88,100



Mountain Region – Western Montana
4800 Wilkie Street – Missoula, MT 59808
(406) – 532 – 5250



Mountain Region – Western Montana
4800 Wilkie Street – Missoula, MT 59808

Conditions:

Knife River would be pleased to complete the work described and will make every attempt to do so during the 2026 construction season. Scheduling of this work is up to the discretion of Knife River. If the work does not take place during the summer of 2026 this proposal will have to be reissued. Communication leading up to the dates of construction will be necessary to schedule this work.

This proposal does not include or account for any of the following:

- ♦ Permits
- ♦ Land surveying / staking
- ♦ Landscaping
- ♦ Quality control testing
- ♦ Engineering drawings
- ♦ Owner changes

Knife River is not a landscaping contractor Knife River any topsoil or landscape work will not be completed by Knife River.

Unit pricing listed on proposal is for customer's reference. Payment will be expected in total.

Alterations to the project may result in changes to this estimate.

Knife River will not be obligated to perform any work not specifically stated in this proposal. Please ask for clarification for anything above not understood.

Payments are expected in full within 30 days of the date invoiced.

The signing of this proposal acknowledges this form as a mutually agreed upon contract.

Please Read Below Statement:

This proposal outlines the cost for improvements outlined here by Knife River. This is what Knife River recommends and this would deliver a desirable product. However, Knife River declines to do this work if an Engineer is not involved to design the actual grading, drainage, and Right-of-Way specifications and requirements for working on Public property. Cost of hiring an Engineering Firm and Survey crew is not accounted for in this proposal.

If you accept this proposal, fill out the bottom of this form and return a copy to my attention. Please contact me with questions, Thank You for the opportunity to bid this work.

A handwritten signature in black ink that reads "Matthew Stafford".

Matthew Stafford

Acceptance Signature

Date



Assistant Project Manager

Cell: (406) – 880 – 4984
Office: (406) – 532 – 5222
E-Mail: Matthew.Stafford@Kniferiver.com



Stacey Richie
406 - 370 - 9156
Richie@Victor.k12.mt.us
Victor High School
425 4th Ave
Victor, MT 59875



Mountain Region – Western Montana
4800 Wilkie Street – Missoula, MT 59808

Date: January 23rd, 2026
Name: Victor School District - Attn: Stacey Richie
Address: 425 4th Ave. Victor, MT 59875
Phone: 406 – 370 – 9156
E-Mail: Richie@Victor.k12.mt.us

Subject: This proposal pertains to the additional parking parking at Victor Elementary School.

Item	Description	Quantity	Units	Unit Price	Subtotal
10	Mobilization Includes all necessary trucks & equipment on and off site.	1	LS	\$2,568.50	\$2,568.50
20	Demolition & Excavation Removal of existng asphalt and pin-down curbs in project area. Excavation and haul-off of existing subgrade material to prep for new parking section.	4,222	ft ²	\$1.50	\$6,333
30	Strom Drain Sumps Installation of two new 8' deep dry well storm drains.	1	EA	\$6,000	\$6,000
40	Gravel Import & Prep Project area will receive approximatley 8" of new crushed gravel base material. Gravel will be graded and compacted to prepare for 3" of new asphalt.	4,222	ft ²	\$2.00	\$8,444
50	Concrete L Curb Concrete crew to form and pour new curb eliminate drainage issue. Concrete to be 4" thick and	188	Lft	\$39.00	\$7,332
60	Asphalt Pavement Paving crew to pave hot mix asphalt. Asphalt will be rolled and compacted to a thickness of 3" minimum. Please allow 24 hours before parking on new asphalt surface.	3,846	ft ²	\$3.75	\$14,422.50
Grand Total					\$45,100



Mountain Region – Western Montana
4800 Wilkie Street – Missoula, MT 59808
(406) – 532 – 5250



Mountain Region – Western Montana
4800 Wilkie Street – Missoula, MT 59808

Conditions:

Knife River would be pleased to complete the work described and will make every attempt to do so during the 2026 construction season. Scheduling of this work is up to the discretion of Knife River. If the work does not take place during the summer of 2026 this proposal will have to be reissued. Communication leading up to the dates of construction will be necessary to schedule this work.

This proposal does not include or account for any of the following:

- ♦ Permits
- ♦ Land surveying / staking
- ♦ Landscaping
- ♦ Quality control testing
- ♦ Engineering drawings
- ♦ Owner changes

Knife River is not a landscaping contractor Knife River any topsoil or landscape work will not be completed by Knife River.

Unit pricing listed on proposal is for customer's reference. Payment will be expected in total.

Alterations to the project may result in changes to this estimate.

Knife River will not be obligated to perform any work not specifically stated in this proposal. Please ask for clarification for anything above not understood.

Payments are expected in full within 30 days of the date invoiced.

The signing of this proposal acknowledges this form as a mutually agreed upon contract.

Please Read Below Statement:

This proposal outlines the cost for improvements outlined here by Knife River. This is what Knife River recommends and this would deliver a desirable product. However, Knife River declines to do this work if an Engineer is not involved to design the actual grading, drainage, and Right-of-Way specifications and requirements for working on Public property. Cost of hiring an Engineering Firm and Survey crew is not accounted for in this proposal.

If you accept this proposal, fill out the bottom of this form and return a copy to my attention. Please contact me with questions, Thank You for the opportunity to bid this work.

A handwritten signature in black ink that reads "Matthew Stafford".

Matthew Stafford

Acceptance Signature

Date



Assistant Project Manager

Cell: (406) – 880 – 4984
Office: (406) – 532 – 5222
E-Mail: Matthew.Stafford@Kniferiver.com



Stacey Richie
406 - 370 - 9156
Richie@Victor.k12.mt.us
Victor Elementary School
425 4th Ave
Victor, MT 59875

Sump

19'-6"

Asphalt
3,846 sf

21'-0"

L Curb
188 ft